




Bayer Sheet Europe



Sales Handbook
April 2011

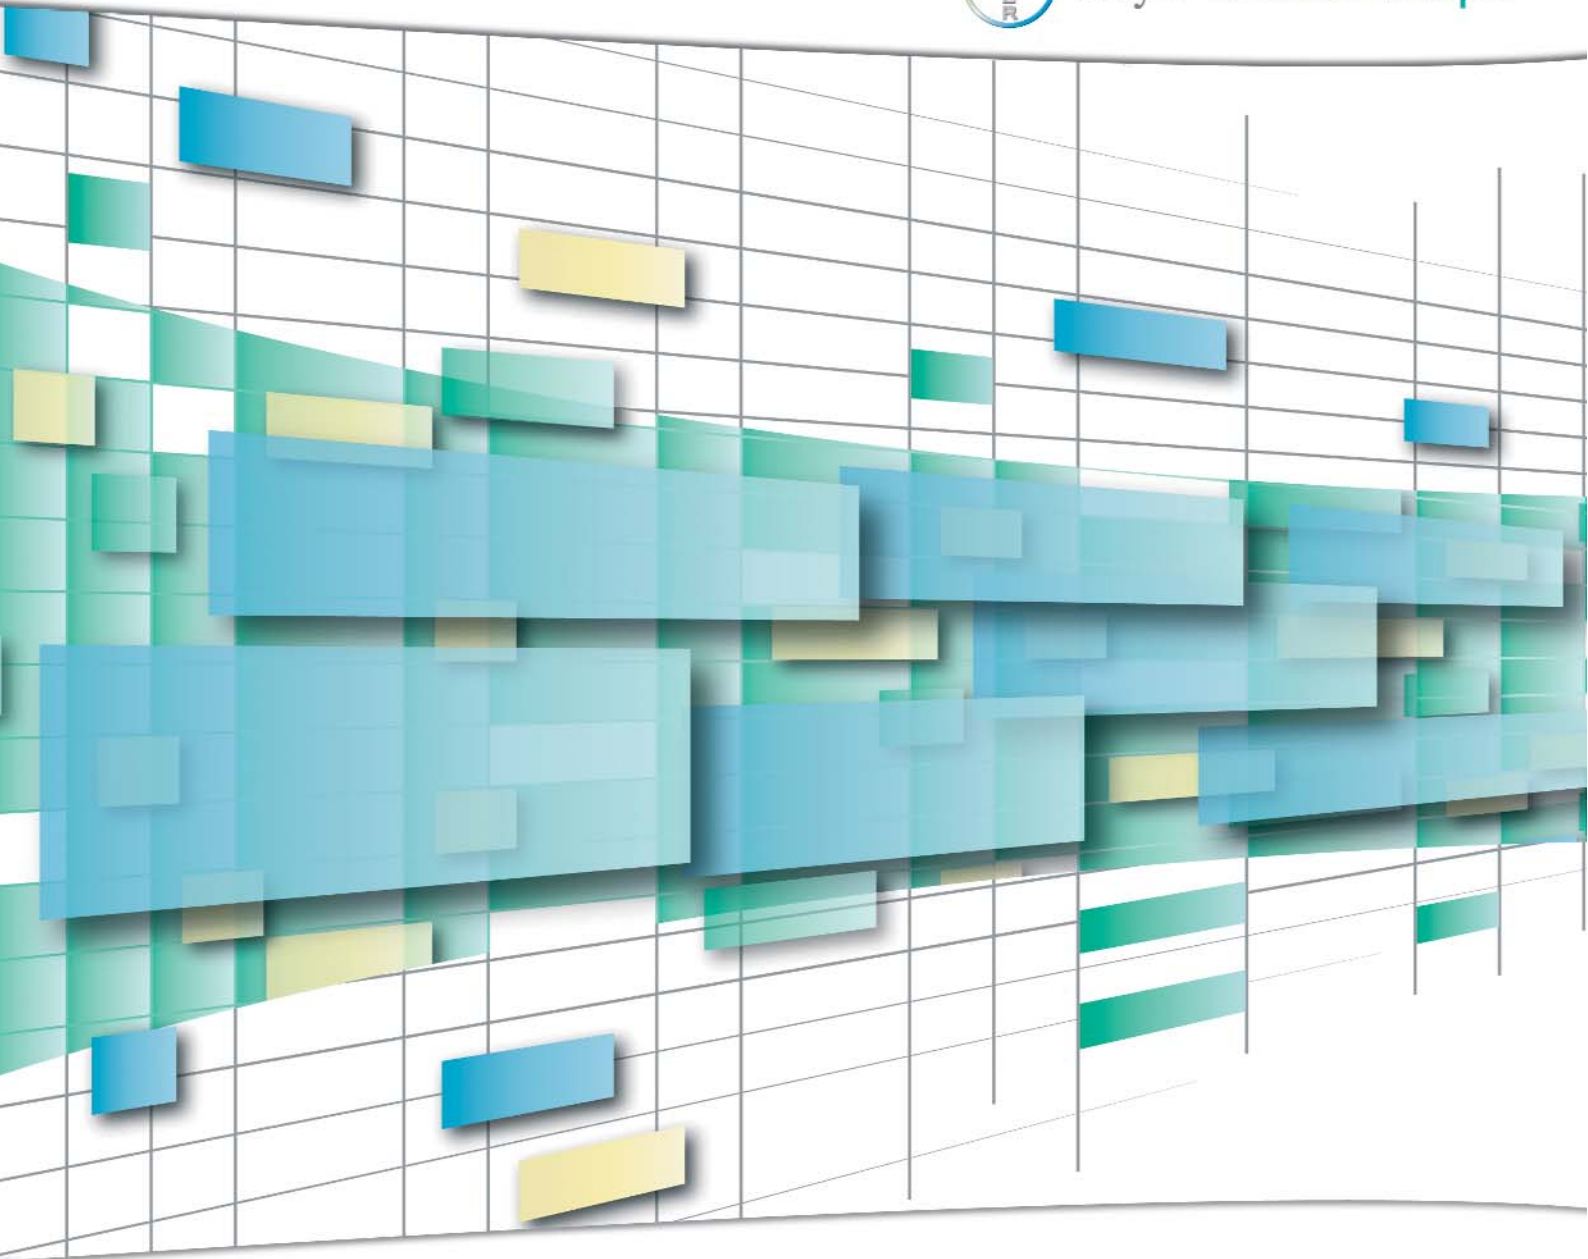

DEFINITIONS

Standard

Production runs planned at regular intervals

Semi-Standard

Production runs depending on market requirements

On request

No planned production runs, minimum order quantity required. The minimum quantity for multi wall sheets is 3 tons. The minimum order quantity for double-sided UV multi wall sheets is 10 tons.

Please ask for the particular minimum order quantity as far as solid sheets are concerned.



makrolon®

Product liability clause: This information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided - especially that contained in our safety data and technical information sheets - and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery. Makrolon® is a registered trademark of Bayer AG



CHANGES IN DELIVERY PROGRAM SOLID SHEETS

For some products, the status (standard, semi-standard, on request) has changed. Please see details on the following pages.



CHANGES IN DELIVERY PROGRAM MAKROLON® MULTI UV

Following products are added to the product range:

Makrolon® Ambient S2S-25

Makrolon® multi UV 4/6-6

The minimum order quantity for double-sided UV multi wall sheets is 10 tons.

For some products, the status (standard, semi-standard, on request) has changed. Please see details on the following pages.



Product liability clause: This information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided - especially that contained in our safety data and technical information sheets - and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery. Makrolon® is a registered trademark of Bayer AG



makrolon®




EXAMPLE: MAKROLON® UV BRONZE 2850

Makrolon®	UV	bronze	2850
Brandname	Properties	Colour group	Definition (4 digits)
Makrolon® Vivak® Axpel®	GP: general purpose UV: UV-protected NR: non-reflective AR: abrasion resistant FR: flame-retardant FG: food grade	clear white bronze grey green blue umbra	<p><u>1st digit: properties</u> - no special properties 2 = 2 sides UV-protected 7 = 1 side abrasion resistant 8 = 2 sides abrasion resistant</p> <p><u>2nd digit: colour</u> 0 clear 1 white 2 orange 3 red 4 violet 5 blue 6 green 7 grey 8 brown / bronze 9 black</p> <p><u>3rd & 4th digit: approximate light transmission at 3 mm*</u> <i>Example: 2850</i> <i>2 sides UV-protected, bronze, LT 50% at 3 mm</i></p>

* only valid for standard products

STRUCTURE (OPTIONAL)

- R: raindrop
- H: haircell
- P: pearl
- X: prism
- G: fine ripples
- C: chairmat

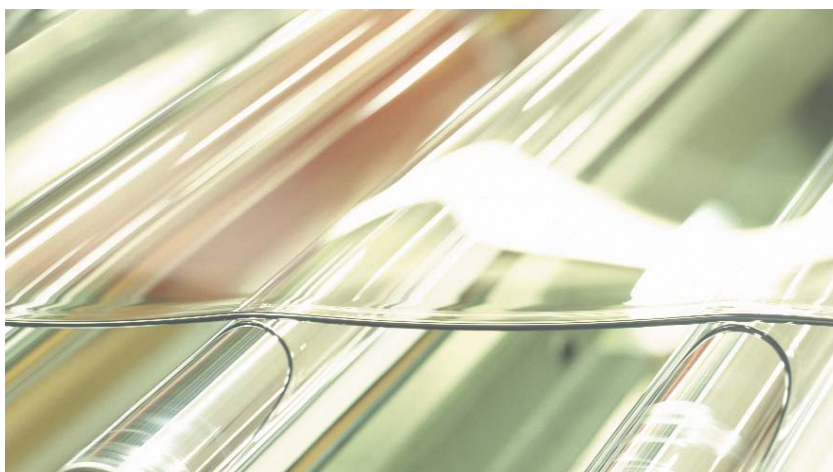

makrolon®

Product liability clause: This information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided - especially that contained in our safety data and technical information sheets - and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery. Makrolon® is a registered trademark of Bayer AG



EXAMPLE: MAKROLON MULTI UV® 3X/16-25 WHITE 1146

Makrolon®	3X/ 16-25	white	1146
Brandname	Geometry	Colour	Definition (4 digits)
Makrolon® multi UV	<u>1st digit: layers</u> 2: twinwall 3: triplewall 4: 4-wall 5: 5-wall 6: 6-wall <u>Optional: structure</u> X: X-structure M: M-structure <u>2nd digit: thickness</u> e.g. 16: 16 mm thick <u>3rd digit: rib distance</u> e. g. 25: 25 mm	clear white bronze green blue	<u>1st digit: properties</u> 1 = 1 side UV-protected 2 = 2 sides UV-protected 4 = 1 side UV, 1 side no drop <u>2nd digit: colour</u> 0 clear 1 white 2 orange 3 red 4 violet 5 blue 6 green 7 grey 8 brown/ bronze 9 black <u>3rd & 4th digit</u> approximate light transmission example: 1146 1 side UV-protected, white, LT ~45%

ADDITIONAL PROPERTIES (OPTIONAL)

IQ-Relax: heat reflecting opal multiwall sheet
 no drop: no drop coating on 1 side
 CC: Climate Control, transparent and heat reflecting



Product liability clause: This information and our technical advise - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided - especially that contained in our safety data and technical information sheets - and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery. Makrolon® is a registered trademark of Bayer AG



VIVAK®

Vivak® is a mono-layer copolyester sheet, which offers nice transparency, high impact resistance, good fire behaviour and excellent thermoforming properties.

Vivak® UV has improved UV-protection on both sides.

DESCRIPTION

VIVAK®			VIVAK® UV		
Density:	1,27 g/cm ³		Density:	1,27 g/cm ³	
Light transmission: (at 3 mm)	clear 099:	88%	Light transmission: (at 3 mm)	clear 2099:	88%
	bronze 850:	60%		white 2130:	30%
	fluo green 680:	80%		grey 2760:	35%
	fluo red 330:	28%			(at 5 mm)
	fluo orange:	52%		bronze 2850:	45%
					(at 5 mm)

STANDARD & SEMI-STANDARD RANGE*

Product	Size	Unit	0,5	0,75	1	1,5	2	3	4	5	6	8	10	12	15
Vivak clear 099	2 050 x 1 250 mm	bulk	500	400	300	200	150	100	75	60	50	40	30	°	°
		carton	80	50	40	30	20	15	10	8	°	°	°	°	°
	3 050 x 2 050 mm	bulk			120	80	60	40	30	24	20	15	12	10*	8*
		carton			40	30	20	15	10	8	6	°	°	°	°
Vivak UV clear 2099	3 050 x 2 050 mm	bulk					60	40	30	24	°	°	°	°	
		carton					°	°	°	°	°	°	°	°	
Vivak UV white 2130	3 050 x 2 050 mm	bulk					°	40	30	°	°	°	°	°	
		carton					°	°	°	°	°	°	°	°	

* For these items the minimum order quantity RTS / CTS is required!

ON REQUEST RANGE

Product	Available widths	Available thicknesses
Vivak bronze 850	1250, 2050 mm	0.75 - 12 mm
Vivak fluo green 680	1250, 2050 mm	0.75 - 12 mm
Vivak fluo red 330	1250, 2050 mm	0.75 - 12 mm
Vivak fluo orange 250	1250, 2050 mm	0.75 - 12 mm
Vivak UV clear 2099	1250 mm	0.75 - 12 mm
Vivak UV grey 2760	1250, 2050 mm	0.75 - 12 mm
Vivak UV bronze 2850	1250, 2050 mm	0.75 - 12 mm

*LEGEND

30	standard
30	semi-standard
°	on request



Product liability clause: This information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided - especially that contained in our safety data and technical information sheets - and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery. Vivak® is a registered trademark of Bayer AG



VIVAK® DESIGN

Vivak® Design are frosted solid sheets made of thermoplastic copolyester. They offer high impact strength, a good fire rating and are fully recyclable.

DESCRIPTION

VIVAK® Design

Density: 1,27 g/cm²
 Light transmission: clear 099: 75%
 (at 3 mm) white 145: 45%

ON REQUEST RANGE

Product	Size	Unit	0,5	0,75	1	1,5	2	3	4	5	6	8	10	12	15
Vivak Design clear 099	2 050 x 1 250 mm	carton					°	°	°	°					
Vivak Design white 145	2 050 x 1 250 mm	carton					°	°	°	°					

*LEGEND

30	standard
30	semi-standard
°	on request



Product liability clause: This information and our technical advise - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided - especially that contained in our safety data and technical information sheets - and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery. Vivak® is a registered trademark of Bayer AG



AXPET®

Axpet® is a mono-layer polyester sheet, which offers nice transparency, good impact resistance and excellent fire behaviour. Axpet® UV has improved UV-protection on one side.

DESCRIPTION

AXPET®				AXPET® UV			
Density:	1,33 g/cm ³			Density:	1,33 g/cm ³		
Light transmission: (at 3 mm)	clear 099:	87%		Light transmission: (at 3 mm)	clear 2099:	87%	
	white 130:	28%					
	white 100:	<1%					
Special grades:	NR:	non-reflective					

STANDARD & SEMI-STANDARD PROGRAMM*

Product	Size	Unit	0,8	1	1,5	2	3	4	5	6
Axpet clear 099	2 050 x 1 250 mm	bulk	375	300	200	150	100	75	°	°
		carton	50	40	30	20	15	10	°	°
	3 050 x 2 050 mm	bulk	150	120	80	60	40	30	24	°
		carton	50	40	30	20	15	10	8	°
Axpet NR clear 099	2 050 x 1 250 mm	bulk	375	300	200	150				
		carton	50	40	30	20				
	3 050 x 2 050 mm	bulk		120						
		carton		°	°	°				
Axpet white 130	2 050 x 1 250 mm	bulk		300	200	150	°	°		
		carton		°	°	°	°	°		
	3 050 x 2 050 mm	bulk		120	80	60	°	°		
		carton		°	°	°	°	°		
Axpet white 100	3 050 x 2 050 mm	bulk		°						
	2 050 x 1 250 mm	carton		°	°	20	°			

ON REQUEST RANGE

Product	Available widths	Available thicknesses
Axpet UV clear 2099	1250, 2050 mm	2 - 6 mm

*LEGEND

30	standard
30	semi-standard
°	on request



Product liability clause: This information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided - especially that contained in our safety data and technical information sheets - and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery. Axpet® is a registered trademark of Bayer AG



Product liability clause: This information and our technical advice - whether verbal, in writing or by way of trials - are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided - especially that contained in our safety data and technical information sheets - and to test products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery. Axpel® is a registered trademark of Bayer AG

